


Metallized Polyester Film Capacitors

100V DC - Axial Type (PE) • Tolerance $\pm 5\%$ @ 1KHz

A range of metallized polyester film capacitors ideal for use in high-performance loudspeaker crossovers and for more general electronics applications.

Particularly suitable when very low DF (less than 1% @ 1KHz) and high current handling are important and when very small capacitance values are required.

Capacitance Value (μF)	Size (mm)				Part Number
	d	L	d \emptyset	s	
0.010	5.0	10.5	0.6	30	U010 V100JPE
0.012	5.0	10.5	0.6	30	U012 V100JPE
0.015	5.0	10.5	0.6	30	U015 V100JPE
0.018	5.0	10.5	0.6	30	U018 V100JPE
0.022	5.0	10.5	0.6	30	U022 V100JPE
0.027	5.0	10.5	0.6	30	U027 V100JPE
0.033	5.0	10.5	0.6	30	U033 V100JPE
0.039	5.0	10.5	0.6	30	U039 V100JPE
0.047	5.0	10.5	0.6	30	U047 V100JPE
0.056	5.0	10.5	0.6	30	U056 V100JPE
0.068	5.0	10.5	0.6	30	U068 V100JPE
0.082	5.5	10.5	0.6	30	U082 V100JPE
0.10	5.5	10.5	0.6	30	U100 V100JPE
0.12	6.0	10.5	0.6	30	U120 V100JPE
0.15	6.5	10.5	0.6	30	U150 V100JPE
0.18	6.0	14.0	0.6	30	U180 V100JPE
0.22	6.0	14.0	0.6	30	U220 V100JPE
0.27	6.5	14.0	0.6	30	U270 V100JPE
0.33	7.0	14.0	0.6	30	U330 V100JPE
0.39	7.5	14.0	0.6	30	U390 V100JPE
0.47	8.0	14.0	0.6	30	U470 V100JPE
0.56	7.5	19.0	0.8	35	U560 V100JPE
0.68	8.0	19.0	0.8	35	U680 V100JPE
0.82	8.5	19.0	0.8	35	U820 V100JPE
1.0	9.0	19.0	0.8	35	1U00 V100JPE
1.2	10.0	19.0	0.8	35	1U20 V100JPE
1.5	10.0	25.0	0.8	35	1U50 V100JPE
1.8	11.0	25.0	0.8	35	1U80 V100JPE
2.2	12.0	25.0	0.8	35	2U20 V100JPE
2.7	13.0	25.0	0.8	35	2U70 V100JPE
3.3	14.0	25.0	0.8	35	3U30 V100JPE
3.9	13.0	32.0	0.8	35	3U90 V100JPE
4.7	14.0	32.0	0.8	35	4U70 V100JPE
5.6	15.0	32.0	0.8	35	5U60 V100JPE
6.8	15.5	32.0	0.8	35	6U80 V100JPE
8.2	18.0	32.0	0.8	35	8U20 V100JPE
10	18.0	47.0	0.8	35	10U00 V100JPE
12	19.5	47.0	0.8	35	12U00 V100JPE
15	21.0	47.0	0.8	35	15U00 V100JPE
18	22.5	47.0	0.8	35	18U00 V100JPE
22	25.0	47.0	0.8	35	22U00 V100JPE
27	27.0	47.0	0.8	35	27U00 V100JPE
30	29.0	47.0	0.8	35	30U00 V100JPE

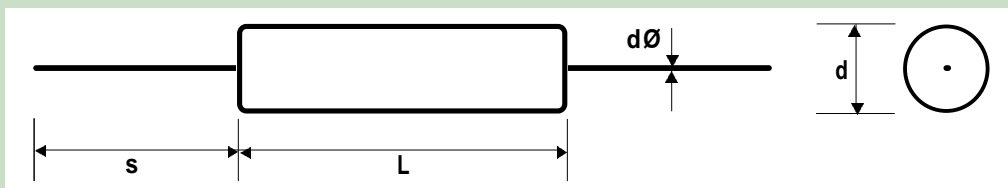

Operating Temperature Range: - 40° C to + 85° C